




SPOA10 WIDE SUPPLEMENT

SPOA10 Capacity 10,000 lbs.

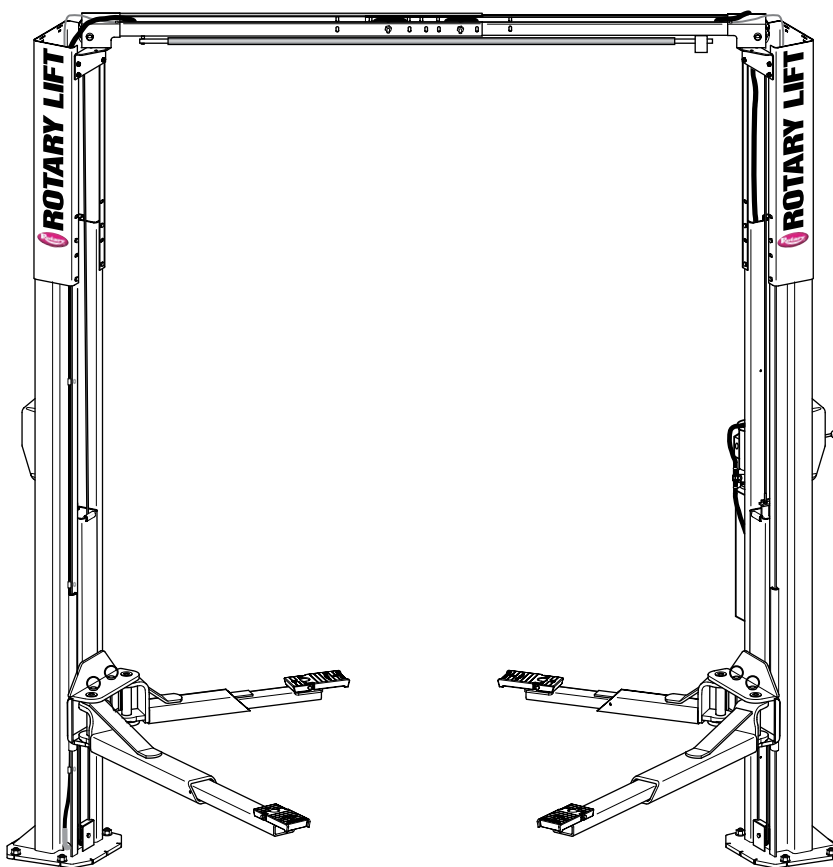


LP20468

I
N
S
T
A
L
L
A
T
I
O
N

I
N
S
T
R
U
C
T
I
O
N
S

Use the figures below to substitute for the Figures in your installation manual.

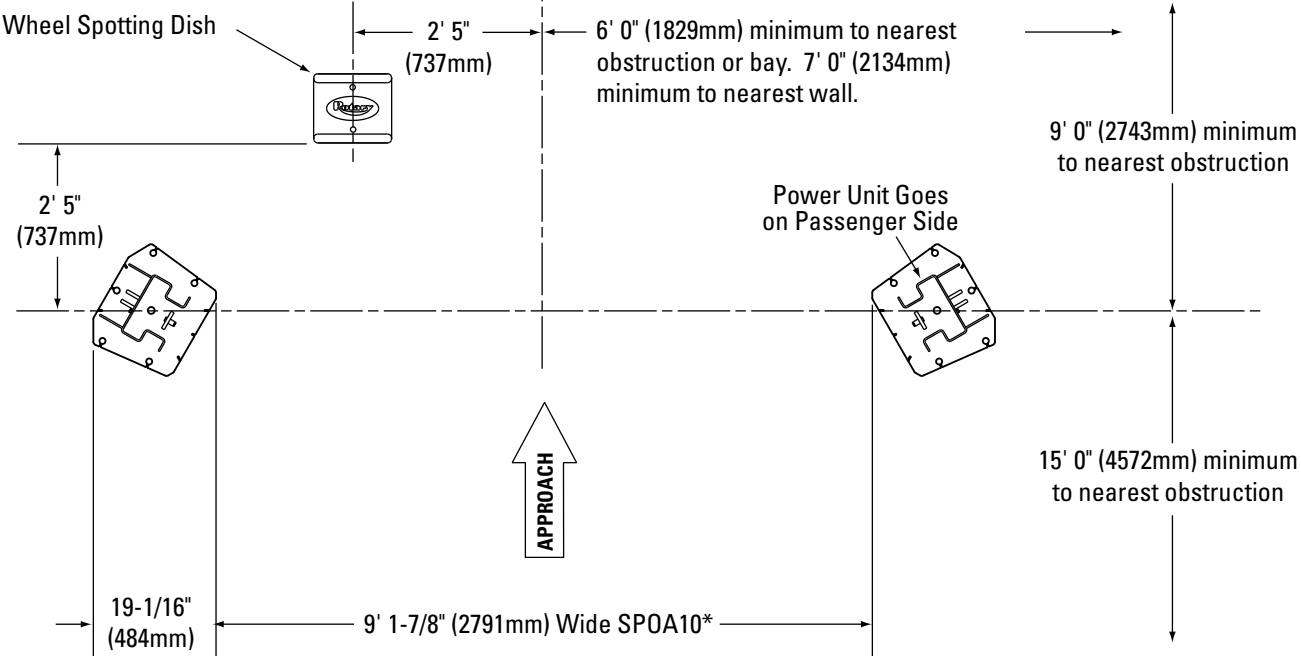

*NOTE: Dimension is from Inside of Baseplate to Inside of Baseplate.

Fig. 1a

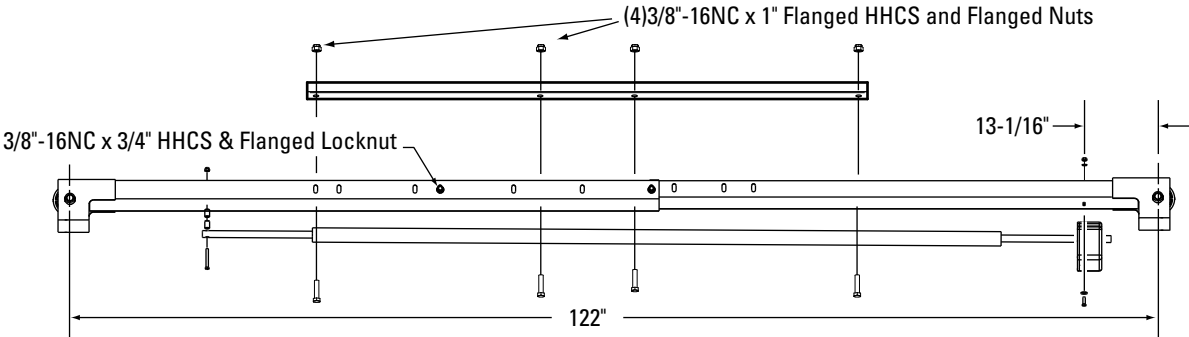


Fig. 12

WIDE SPOA10

PARTS SUPPLEMENT

Left Hand Overhead Assembly (Outer).....	N493-1
Right Hand Overhead Assembly (Inner).....	N494-1
Overhead Stiffener Angle.....	N463
Equalizer Cable	
Standard Height.....	N3129

EH-1	N3130
EH-2	N3131
Overhead Hose	
Standard Height.....	N394
EH-1	N370
EH-2	N3110

Rotary World Headquarters
2700 Lanier Drive
Madison, IN 47250, USA
www.rotarylif.com

North America Contact Information
Tech. Support:
 p 800.445.5438
 f 800.578.5438
 e userlink@rotarylif.com
Sales:
 p 800.640.5438
 f 800.578.5438
 e userlink@rotarylif.com

World Wide Contact Information
World Headquarters/USA: 1.812.273.1622
Canada: 1.905.812.9920
European Headquarters/Germany: +49.771.9233.0
United Kingdom: +44.178.747.7711
Australasia: +60.3.7660.0285
Latin America / Caribbean: +54.3488.431.608
Middle East / Northern Africa: +49.771.9233.0

© Vehicle Service GroupSM
Printed in U.S.A., All Rights Reserved. Unless otherwise indicated, ROTARY, and all other trademarks are property of Dover Corporation and its affiliates.

